


MODEL J SERIES – FRAME SIZE II

LATCH NEEDLE SINKER TOP, SINGLE KNIT MACHINE

Available in 6 Interchangeable Diameters

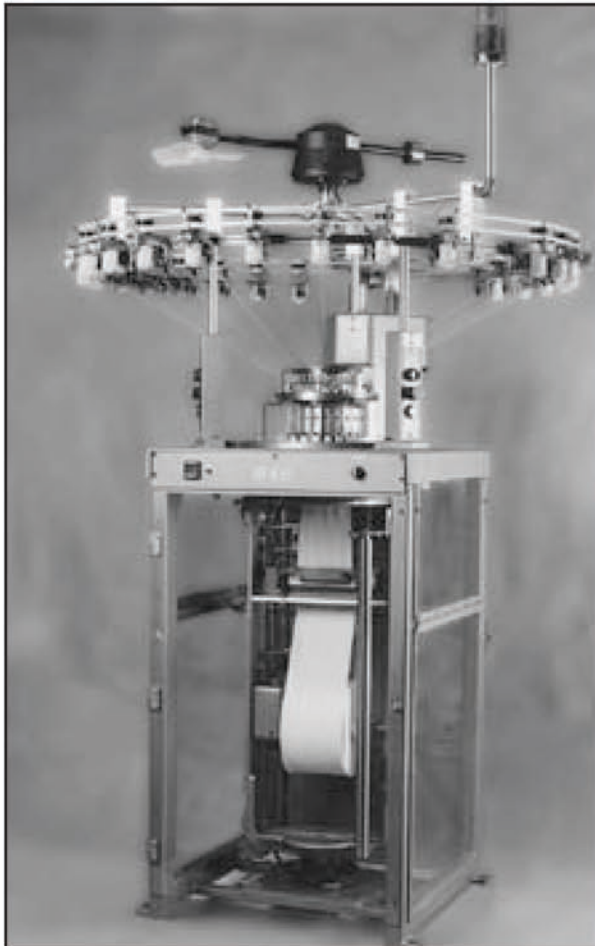

option features

- Preset revolution counter
- Lycra feed system
- Omnidirectional warning light system – 2 color
- Lock-out switch – manual motor starting switch setup for manual lockout
- Standard range of voltages available(380,416 480 and 550)
- Upper level multi-directional single fan lint blowing system
- Multi-speed positive storage feeding system



TOMPKINS USA

623 Oneida Street
 Syracuse, New York U.S.A. 13202
 Telephone: (315) 422-8763
 FAX: (315) 422-8762
 Website: www.tompkinsusa.com
 Email: customerservice@tompkinsusa.com

Specifications

Diameter	Model No.	No. Feeds	RPM*	Cut (needles/inch)
11 inch (27.94cm)	J1144	44	109	16-32
12 inch (30.48cm)	J1248	48	100	16-32
13 inch (33.02cm)	J1352	52	92	16-32
14 inch (35.56cm)	J1456	56	86	16-32
15 inch (38.10cm)	J1560	60	80	16-32
16 inch (40.64cm)	J1664	64	75	16-32

*Machine RPM is dependent on yarn quality and fabric configuration.

Machine Specifications

Height	105 in. (266.70 cm) to the top of Side Creel Tubes
Width – Outside Diameter At Positive Storage Feeders	60 in. (152.4 cm)
At Floor	37 in. x 38 in. (94.0 cm x 96.5 cm)
Weight	1700 pounds (771 kg)
Horsepower	2.0
Drive System	Tompkins Electronic AC Motor Controller with smooth start and stop
Standard Electrics	All models 220 volts, single or 3 phase, 50/60 hertz power (voltage range 253 to 188). If other operating voltage is required, contact Tompkins
Needle Cut	16,18,24,28
Track	Single and two track
Positive Storage Feeder System	With input and output stop motions, tensioner and knot catcher – standard on all models.
Fabric Collection – Electronic	2 roll balanced takedown system to reduce high speed vibration with precision rollup for 24 inch diameter roll.
Interchangeable Heads Rapid Change System	All diameters in the Frame Size II range of 11 to 16 inches. For Example: The knitting head of a 11 inch diameter machine can be easily replaced with a 16 inch diameter knitting head.
Drop gates	For easy accessibility.
Machine Speeds	Start, stop and jog, with three programmable jog speeds.
Needle Detectors	Standard on all models
Lubrication System	Projectile lubricator with auto flush system.
Safety Roll Shutoff	Standard on all models

Creel Specifications

Side Creel	Unlimited yarn cone capacity. Complete with hard tubes, support brackets and all hardware setup for double coning. Ceramic guides at all yarn bends and entrances.
------------	--